



**Model:EFT2**


**Assembly, Installation and Operation Manual**

 II 2G c T5

 II 2D c T100°C

 II 2 G Ex h IIB T4...T3 Gb

**UK  
CA**

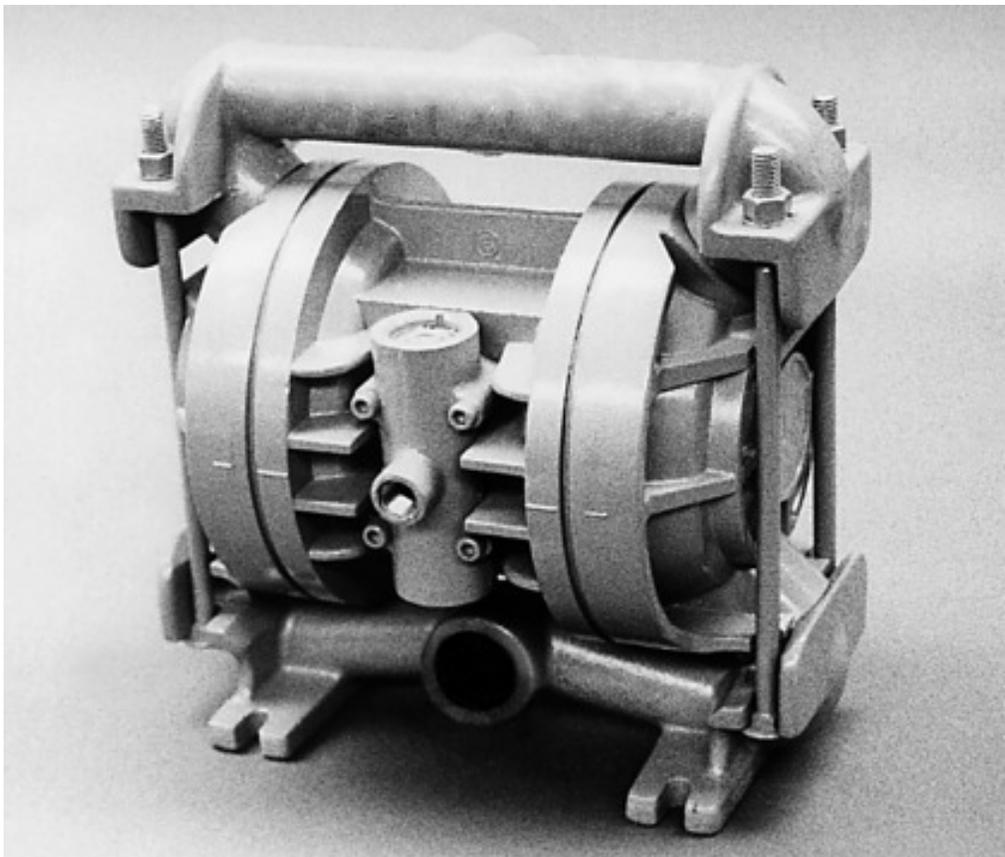

**Enviroflex Ltd**

**Pump Point, 21 Ascot Drive, DERBY, DE24 8GZ, United Kingdom**

**[www.enviroflexpumps.com](http://www.enviroflexpumps.com)**

# EFT PUMP DESIGNATION SYSTEM

**EFT2/XXXXX / XXX / XX / XXX / XXXX**

MODEL

WETTED PARTS & OUTER PISTON

AIR CHAMBERS OR CENTER SECTION

CENTER BLOCK OR CENTER SECTION

AIR VALVE

DIAPHRAGMS

VALVE BALLS

VALVE SEAT

O-RINGS

SPECIALTY  
CODE

(if applicable)

## MATERIAL CODES

### MODEL

EFT2 = 25 MM (1")

### WETTED PARTS & OUTER PISTON

AA = ALUMINUM / ALUMINUM

WW = CAST IRON / CAST IRON

WM = CAST IRON / MILD STEEL

### AIR CHAMBER / CENTER SECTION

A = ALUMINUM

M = MILD STEEL

P = POLYPROPYLENE

### CENTER BLOCK / CENTER SECTION

A = ALUMINUM

P = POLYPROPYLENE

### AIR VALVE

B = BRASS

### DIAPHRAGMS

BNS = BUNA-N (Red Dot)

BNU = BUNA-N, ULTRA-FLEX  
(Red Dot)

EPS = EPDM (Blue Dot)

EPU = EPDM, ULTRA-FLEX  
(Blue Dot)

FSS = SANIFLEX  
[Hytrell (Cream)]

NES = NEOPRENE (Green Dot)

NEU = NEOPRENE, ULTRA-FLEX  
(Green Dot)

PUS = POLYURETHANE (Clear)

TEU = PTFE W/EPDM  
BACK-UP (White)

TNU = PTFE W/NEOPRENE  
BACK-UP (White)

TSU = PTFE W/SANIFLEX  
BACK-UP (White)

VTS = VITON (White Dot)

VTU = VITON, ULTRA-FLEX  
(White Dot)

WFS = SANTOPRENE (Orange Dot)

### VALVE BALL

BN = BUNA-N (Red Dot)

EP = EPDM (Blue Dot)

FS = SANIFLEX  
[Hytrell (Cream)]

NE = NEOPRENE (Green Dot)

PU = POLYURETHANE (Brown)

TF = PTFE (White)

VT = VITON (White Dot)

WF = SANTOPRENE (Orange Dot)

### VALVE SEAT

A = ALUMINUM

BN = BUNA-N (Red Dot)

EP = EPDM (Blue Dot)

FS = SANIFLEX  
[Hytrell (Cream)]

H = ALLOY C

M = MILD STEEL

NE = NEOPRENE (Green Dot)

PU = POLYURETHANE (Brown)

S = STAINLESS STEEL

VT = VITON (White Dot)

WF = SANTOPRENE (Orange Dot)

No valve seat o-ring required.

### VALVE SEAT O-RING

BN = BUNA-N (Red Dot)

FS = FLUORO-SEAL

TF = PTFE (White)

### SPECIALTY CODES

0014 BSPT

# THE EF PUMP - HOW IT WORKS

The diaphragm pump is an air-operated, positive displacement, self-priming pump. These drawings show the flow pattern through the pump upon its initial stroke. It is assumed the pump has no fluid in it prior to its initial stroke.

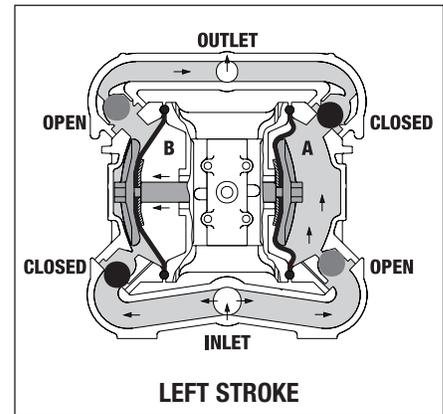
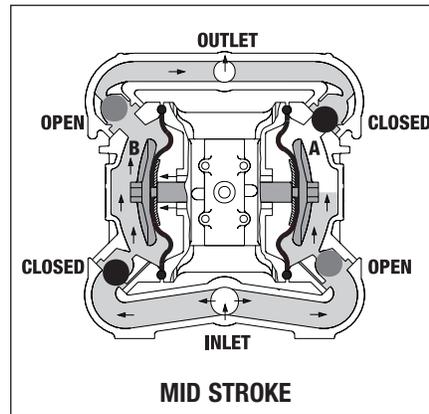
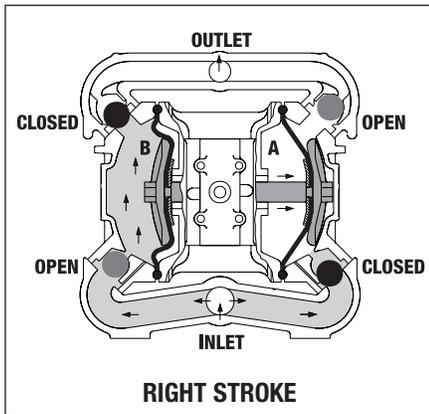


FIGURE 1 The air valve directs pressurized air to the back side of diaphragm A. The compressed air is applied directly to the liquid column separated by elastomeric diaphragms. The diaphragm acts as a separation membrane between the compressed air and liquid, balancing the load and removing mechanical stress from the diaphragm. The compressed air moves the diaphragm away from the center block of the pump. The opposite diaphragm is pulled in by the shaft connected to the pressurized diaphragm. Diaphragm B is on its suction stroke; air behind the diaphragm has been forced out to the atmosphere through the exhaust port of the pump. The movement of diaphragm B toward the center block of the pump creates a vacuum within chamber B. Atmospheric pressure forces fluid into the inlet manifold forcing the inlet valve ball off its seat. Liquid is free to move past the inlet valve ball and fill the liquid chamber (see shaded area).

FIGURE 2 When the pressurized diaphragm, diaphragm A, reaches the limit of its discharge stroke, the air valve redirects pressurized air to the back side of diaphragm B. The pressurized air forces diaphragm B away from the center block while pulling diaphragm A to the center block. Diaphragm B is now on its discharge stroke. Diaphragm B forces the inlet valve ball onto its seat due to the hydraulic forces developed in the liquid chamber and manifold of the pump. These same hydraulic forces lift the discharge valve ball off its seat, while the opposite discharge valve ball is forced onto its seat, forcing fluid to flow through the pump discharge. The movement of diaphragm A toward the center block of the pump creates a vacuum within liquid chamber A. Atmospheric pressure forces fluid into the inlet manifold of the pump. The inlet valve ball is forced off its seat allowing the fluid being pumped to fill the liquid chamber.

FIGURE 3 At completion of the stroke, the air valve again redirects air to the back side of diaphragm A, which starts diaphragm B on its exhaust stroke. As the pump reaches its original starting point, each diaphragm has gone through one exhaust and one discharge stroke. This constitutes one complete pumping cycle. The pump may take several cycles to completely prime depending on the conditions of the application.

# MODEL EFT2 METAL

## CAUTIONS - READ FIRST

---



### TEMPERATURE LIMITS:

Polypropylene	0°C to 79°C	32°F to 175°F
Neoprene	-17.8°C to 93.3°C	0°F to 200°F
Buna-N	-12.2°C to 82.2°C	10°F to 180°F
EPDM	-51.1°C to 137.8°C	-60°F to 280°F
Viton	-40°C to 176.7°C	-40°F to 350°F
Santoprene	-40°C to 107.2°C	-40°F to 225°F
Polyurethane	-12.2°C to 65.6°C	10°F to 150°F
Hytrel	-28.9°C to 104.4°C	-20°F to 220°F
PTFE	4.4°C to 148.9°C	40°F to 300°F



**CAUTION:** When choosing pump materials, be sure to check the temperature limits for all wetted components. Example: Viton has a maximum limit of 176.7°C (350°F) but polypropylene has a maximum limit of only 79°C (175°F).



**CAUTION:** Maximum temperature limits are based upon mechanical stress only. Certain chemicals will significantly reduce maximum safe operating temperatures. Consult engineering guide for chemical compatibility and temperature limits.



**CAUTION:** Always wear safety glasses when operating pump. If diaphragm rupture occurs, material being pumped may be forced out air exhaust.



**WARNING:** Prevention of static sparking — If static sparking occurs, fire or explosion could result. Pump, valves, and containers must be properly grounded when handling flammable fluids and whenever discharge of static electricity is a hazard.



**CAUTION:** Do not exceed 8.6 Bar (125 psig) air supply pressure. (3.4 Bar [50 psig] for UL models.)



**CAUTION:** Before any maintenance or repair is attempted, the compressed air line to the pump should be disconnected and all air pressure allowed to bleed from pump. Disconnect all intake, discharge and air lines. Drain the pump by turning it upside down and allowing any fluid to flow into a suitable container.



**CAUTION:** Blow out air line for 10 to 20 seconds before attaching to pump to make sure all pipe line debris is clear. Use an in-line air filter. A 5µ (micron) air filter is recommended.



**NOTE:** Tighten clamp bands and retainers prior to installation. Fittings may loosen during transportation.



**NOTE:** When installing Teflon diaphragms, it is important to tighten outer pistons simultaneously (turning in opposite directions) to ensure tight fit.



**NOTE:** Before starting disassembly, mark a line from each liquid chamber to its corresponding air chamber. This line will assist in proper alignment during reassembly.



**CAUTION:** Verify the chemical compatibility of the process and cleaning fluid to the pump's component materials in the Chemical Resistance Guide.



**CAUTION:** When removing the end cap using compressed air, the air valve end cap may come out with considerable force. Hand protection such as a padded glove or rag should be used to capture the end cap.



**CAUTION:** Only explosion proof (NEMA 7) solenoid valves should be used in areas where explosion proof equipment is required.



**NOTE:** All non lube-free air-operated pumps must be lubricated. Enviroflex suggests an arctic 5 weight oil (ISO grade 15). Do not over-lubricate pump. Over-lubrication will reduce pump performance.



**NOTE:** UL-listed pumps must not exceed 3.4 Bar (50 psig) air supply pressure.



**CAUTION:** Do not lubricate lube-free pumps.

# Performance


EFT2

Height .....279.4 mm (11")  
 Width .....267.5 mm (10.53")  
 Depth .....184.2 mm (7.25")  
 Ship Weight .....Aluminum 12 kg (26 lbs.)  
                                   Stainless Steel 16.3 kg (36 lbs.)  
                                   Hastelloy 18.1 kg (40 lbs.)  
 Air Inlet .....6.35 mm (1/4")  
 Inlet .....25.4 mm (1")  
 Outlet .....19.1 mm (3/4")  
 Suction Lift .....5.18 m Dry (17')  
                                   9.45 m Wet (31')

Displacement per  
 Stroke ..... .41 l (0.105 gal.)  
 Max. Flow Rate .....132.49 lpm (35.0 gpm)  
 Max. Size Solids .....3.18 mm (1/8")  
 Displacement per stroke was calculated at 4.8 Bar (70 psig) air inlet pressure against a 2 Bar (30 psig) head pressure.

**Example:** To pump 68.1 lpm (18.0 gpm) against a discharge pressure head of 2.7 Bar (40 psig) requires 4.1 Bar (60 psig) and 18.7 Nm<sup>3</sup>/h (11 scfm) air consumption. (See dot on chart.)


**Caution:** Do not exceed 8.6 Bar (125 psig) air supply pressure.

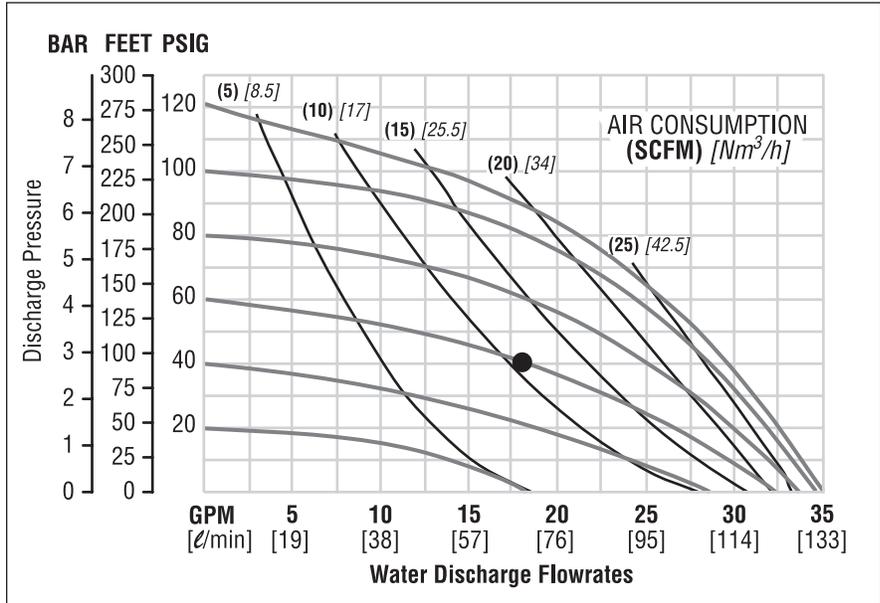

Flow rates indicated on chart were determined by pumping water.

For optimum life and performance, pumps should be specified so that daily operation parameters will fall in the center of the pump performance curve.


## Dimensional Drawings for EFT2 Pumps

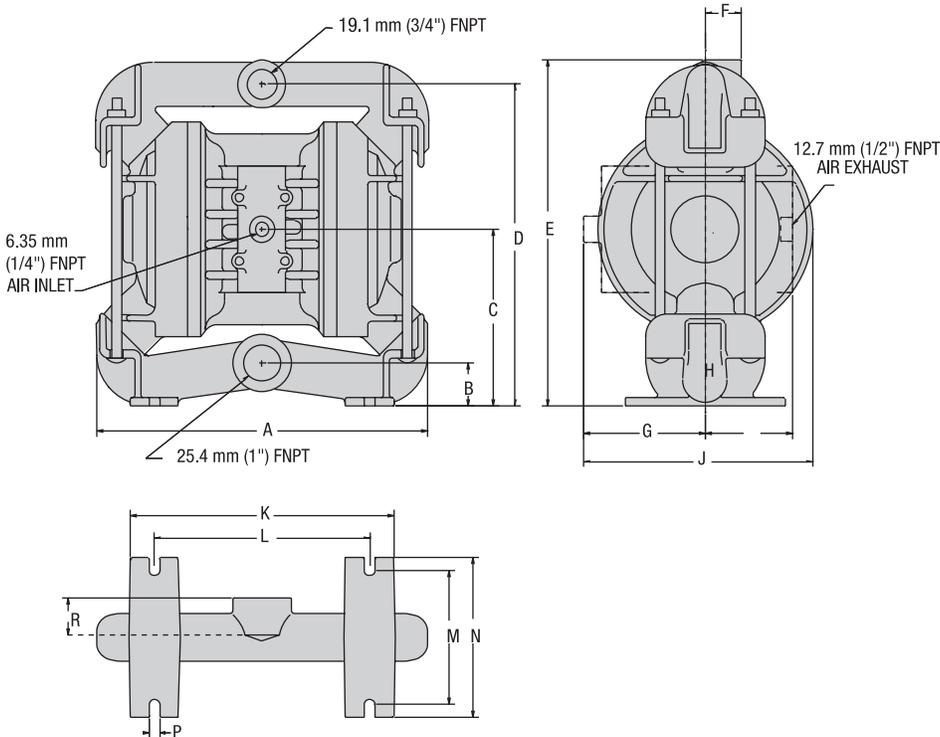

DIMENSIONS – EFT2 (METAL)		
ITEM	METRIC (mm)	STANDARD (inch)
A	267.5	10.53
B	36.5	1.43
C	138.0	5.43
D	254.0	10.00
E	279.4	11.00
F	28.6	1.12
G	95.3	3.75
H	77.0	3.03
J	184.2	7.25
K	209.6	8.25
L	171.5	6.75
M	106.4	4.18
N	127.0	5.00
P	7.9	.31
R	31.8	1.25

BSP threads available.

# SUGGESTED INSTALLATION

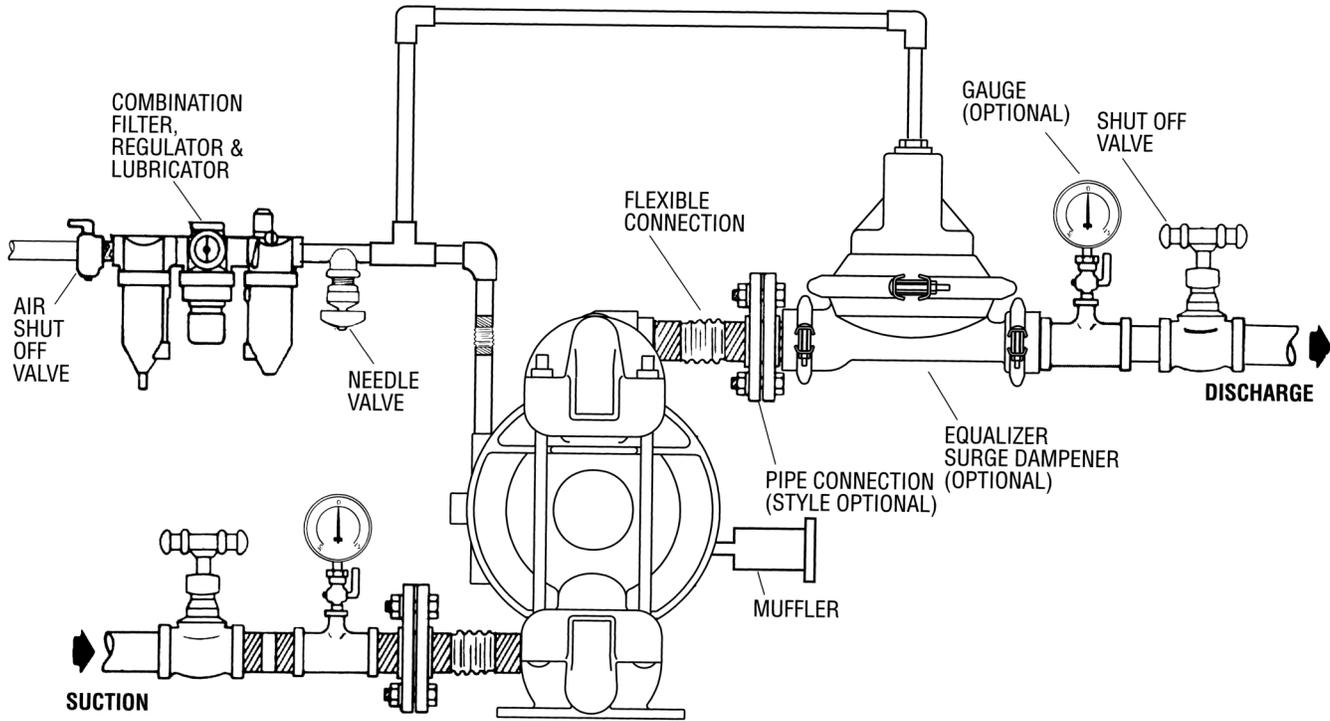

**NOTE:** In the event of a power failure, the shutoff valve should be closed, if the restarting of the pump is not desirable once power is regained.

**AIR OPERATED PUMPS:** To stop the pump from operating in an emergency situation, simply close the “shut-off” valve (user supplied) installed in the air supply line. A properly functioning valve will stop the air supply to the pump, therefore stopping output. This “shut-off” valve should be located far enough away from the pumping equipment such that it can be reached safely in an emergency situation.


# SUGGESTED OPERATION AND MAINTENANCE INSTRUCTIONS

**OPERATION:** Pump discharge rate can be controlled by limiting the volume and/or pressure of the air supply to the pump (preferred method). An air regulator is used to regulate air pressure. A needle valve is used to regulate volume. Pump discharge rate can also be controlled by throttling the pump discharge by partially closing a valve in the discharge line of the pump. This action increases friction loss which reduces flow rate. This is useful when the need exists to control the pump from a remote location. When the pump discharge pressure equals or exceeds the air supply pressure, the pump will stop; no bypass or pressure relief valve is needed, and pump damage will not occur. The pump has reached a “deadhead” situation and can be restarted by reducing the fluid discharge pressure or increasing the air inlet pressure. The Enviroflex EFT2 pump runs solely on compressed air and does not generate heat, therefore your process fluid temperature will not be affected.

**RECORDS:** When service is required, a record should be made of all necessary repairs and replacements. Over a period of time, such records can become a valuable tool for predicting and preventing future maintenance problems and unscheduled downtime. In addition, accurate records make it possible to identify pumps that are poorly suited to their applications.

**MAINTENANCE AND INSPECTIONS:** Since each application is unique, maintenance schedules may be different for every pump. Frequency of use, line pressure, viscosity and abrasiveness of process fluid all affect the parts life of a EF pump. Periodic inspections have been found to offer the best means for preventing unscheduled pump downtime. Personnel familiar with the pump’s construction and service should be informed of any abnormalities that are detected during operation.

# EXPLODED VIEWS FOR EFT2 PUMPS

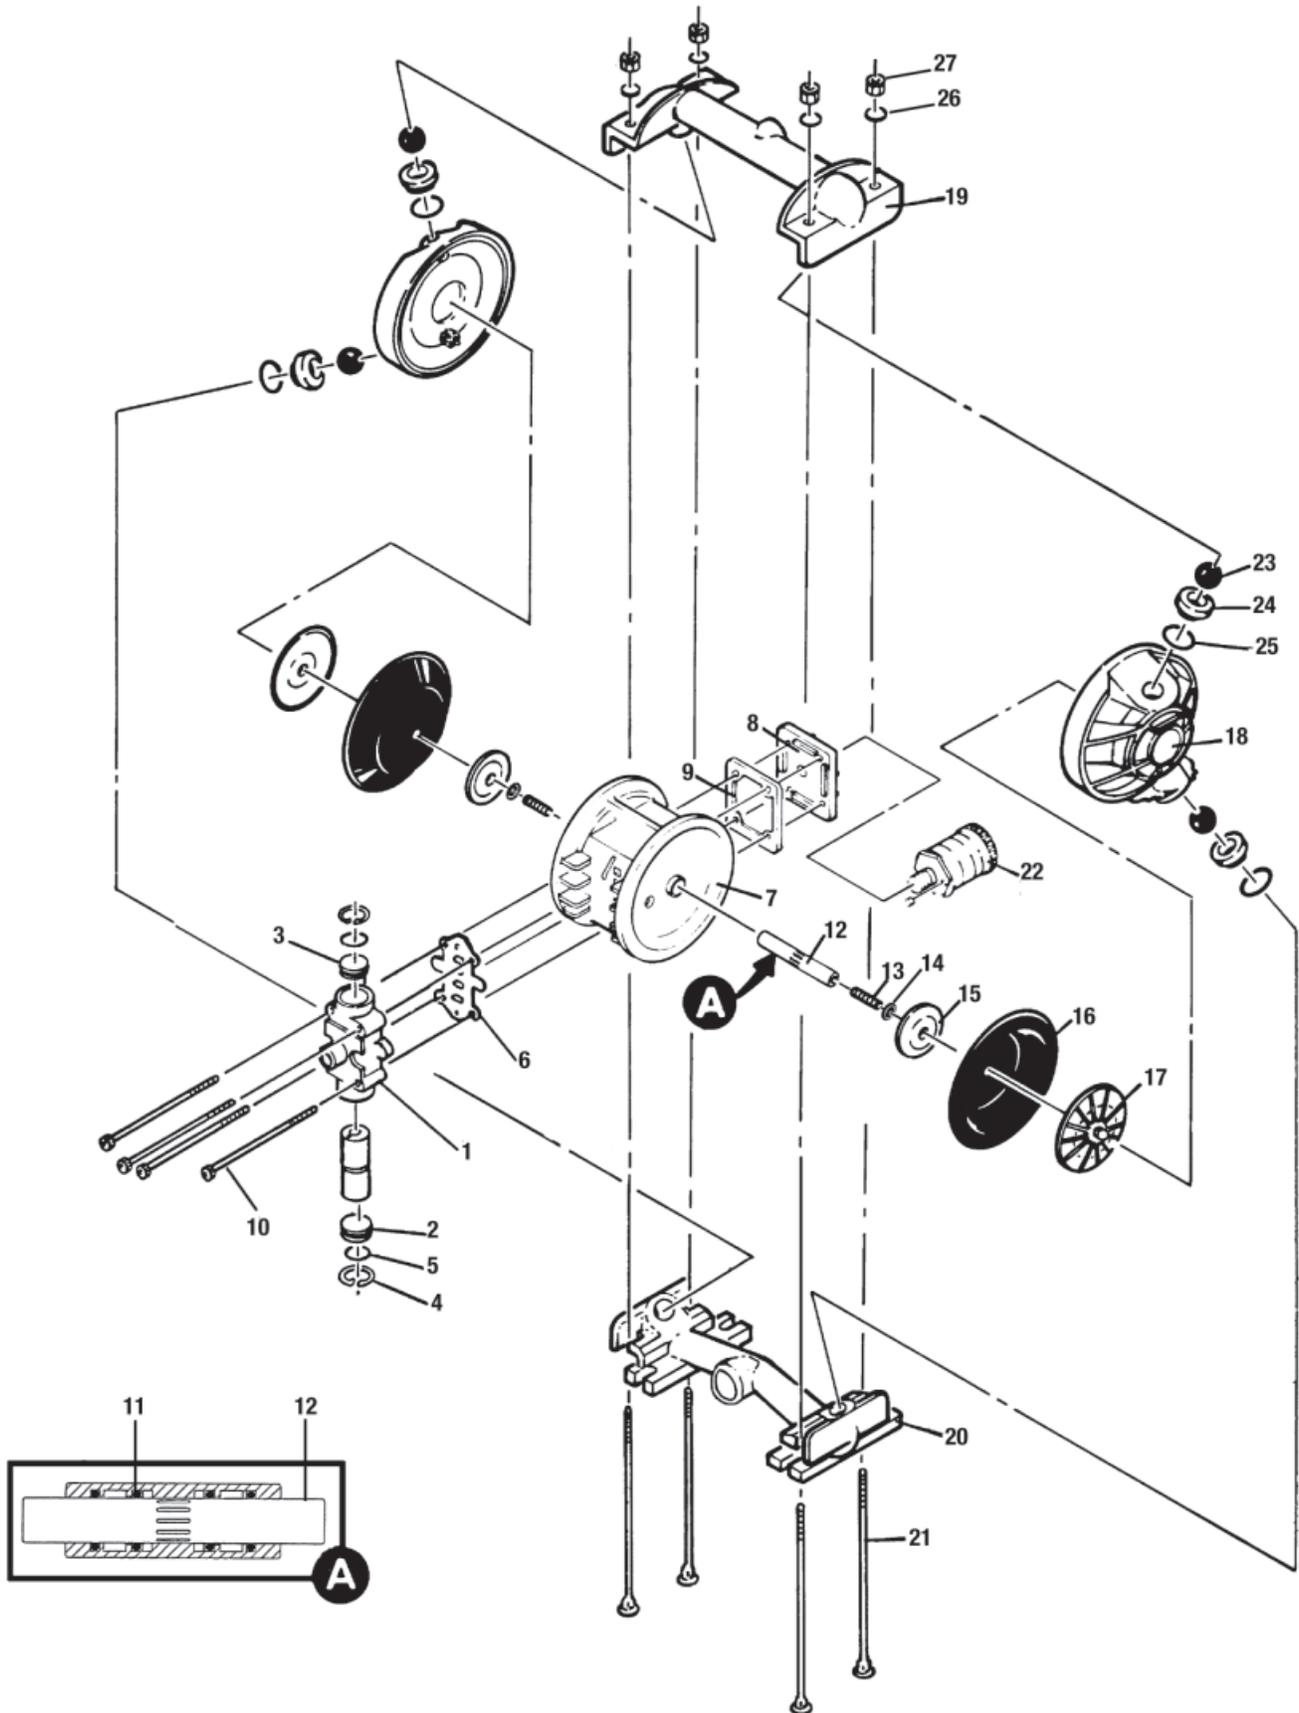

# EFT2 Parts List

Item	EFT2/AAAB Part Number	EFT2/AAAB Mtl	EFT2/SAAB Part Number	EFT2/SAAB Mtl	Description	Qty
1	EF02-2000-07	Brass	EF02-2000-07	Brass	Air Valve Assembly	1
2	EF02-2331-23	Nylon	EF02-2331-23	Nylon	Air Valve Cap wo/Guide (Bottom)	1
3	EF02-2301-23	Nylon	EF02-2301-23	Nylon	Air Valve Cap w/Guide (Top)	1
4	EF02-2650-03	Stainless steel	EF02-2650-03	Stainless steel	Snap Ring	2
5	EF02-3200-52-200	Buna-N	EF02-3200-52-200	Buna-N	Air Valve Cap O-Ring	2
6	EF02-2600-52	Buna-N	EF02-2600-52	Buna-N	Air Valve Gasket	1
7	EF02-3150-01-225	Aluminum	EF02-3150-06-225	Electroless nickel plated	Center Section	1
8	EF02-3180-01	Aluminum	EF02-3180-01	Aluminum	Muffler Plate	1
9	EF02-3500-52-110	Buna-N	EF02-3500-52-110	Buna-N	Muffler Plate Gasket	1
10	EF02-6000-08	Alloy steel	EF02-6000-08	Alloy steel	Air Valve Screws 1/4-20 x 6"	4
	N/A	/	N/A	/	Hex Nut 1/4-20,(Not Shown)	4
11	EF02-3210-55-225	PTFE	EF02-3210-55-225	PTFE	Center Section Gly Ring	4
12	EF02-3800-03-07	Stainless steel	EF02-3800-03-07	Stainless steel	Shaft	1
13	N/R	/	EF02-6150-08	Alloy steel	Stud 3/8"-16 x 11/4"	2
14	EF02-6802-08	Alloy steel	EF02-6802-08	Alloy steel	Disc Spring	2
15	EF02-3700-08	Alloy steel	EF02-3700-08	Alloy steel	Pistons — Inner	2
16	EF02-1010-50	Polyurethane	EF02-1010-50	Polyurethane	Diaphragm	2
16	EF02-1010-51	Neoprene	EF02-1010-51	Neoprene	Diaphragm	2
16	EF02-1010-52	Buna-N	EF02-1010-52	Buna-N	Diaphragm	2
16	EF02-1010-53	Viton	EF02-1010-53	Viton	Diaphragm	2
16	EF02-1010-54	EPDM	EF02-1010-54	EPDM	Diaphragm	2
16	EF02-1010-55	PTFE	EF02-1010-55	PTFE	Diaphragm	2
16	EF02-1010-56	Hytrel	EF02-1010-56	Hytrel	Diaphragm	2
16	EF02-1010-58	Santoprene	EF02-1010-58	Santoprene	Diaphragm	2
17	EF02-4550-01	Aluminum	EF02-4550-03	Stainless steel	Pistons — Outer	2
18	EF02-5000-01	Aluminum	EF02-5000-03	Stainless steel	Liquid Chamber	2
19	EF02-5020-01	Aluminum	EF02-5020-03	Stainless steel	Discharge Manifold	1
20	EF02-5080-01	Aluminum	EF02-5080-03	Stainless steel	Inlet Housing	1
21	EF02-6080-08	Alloy steel	EF02-6080-03	Stainless steel	Manifold Bolt 3/8"-16 x 8-1/2"	4
22	EF02-3510-99	/	EF02-3510-99	/	Muffler	1
23	EF02-1080-50	Polyurethane	EF02-1080-50	Polyurethane	Valve Balls	4
23	EF02-1080-51	Neoprene	EF02-1080-51	Neoprene	Valve Balls	4
23	EF02-1080-52	Buna-N	EF02-1080-52	Buna-N	Valve Balls	4
23	EF02-1080-53	Viton	EF02-1080-53	Viton	Valve Balls	4
23	EF02-1080-54	EPDM	EF02-1080-54	EPDM	Valve Balls	4
23	EF02-1080-55	PTFE	EF02-1080-55	PTFE	Valve Balls	4
23	EF02-1080-56	Hytrel	EF02-1080-56	Hytrel	Valve Balls	4
23	EF02-1080-58	Santoprene	EF02-1080-58	Santoprene	Valve Balls	4
24	EF02-1120-01	Aluminum	EF02-1120-03	Stainless steel	Valve Seat	4
25	EF02-1200-50	Polyurethane	EF02-1200-50	Polyurethane	Valve Seat O-Ring	4
25	EF02-1200-52	Buna-N	EF02-1200-52	Buna-N	Valve Seat O-Ring	4
25	EF02-1200-54	EPDM	EF02-1200-54	EPDM	Valve Seat O-Ring	4
25	EF02-1200-55	PTFE	EF02-1200-55	PTFE	Valve Seat O-Ring	4
25	EF02-1200-56	Hytrel	EF02-1200-56	Hytrel	Valve Seat O-Ring	4
25	EF02-1200-58	Santoprene	EF02-1200-58	Santoprene	Valve Seat O-Ring	4
26	EF15-6720-08	Alloy steel	EF02-6730-03	Stainless steel	Manifold Bolt Washer 3/8"	4
27	EF02-6430-08	Alloy steel	EF02-6430-03	Stainless steel	Manifold Bolt Nut 3/8"-16	4





# Annex I

No. 3N221114.ECC82

## Model(s):

EFG05 series, EFG1F series, EFG15 series, EFG20 series, EFG30 series;  
 EF05 metallic series, EF1F metallic series, EF15 metallic series, EF20 metallic series,  
 EF30 metallic series;  
 EF02 non-metallic conductive series, EF05 non-metallic conductive series,  
 EF07 non-metallic conductive series, EF10 non-metallic conductive series,  
 EF1F non-metallic conductive series, EF15 non-metallic conductive series,  
 EF20 non-metallic conductive series;  
 EF66605H series, EF66610X metallic series, EF66615X metallic series,  
 EF6662XX metallic series, EF6663XX metallic series;  
 EFPD15 metallic series, EFPD20 metallic series, EFPD30 metallic series;  
 EFT02 series, EFT04 series, EFT08 series, EFT15 series;  
 EFE5 metallic series;  
 EFHDF10 series, EFHDF20 series, EFHDF30 series, EFHDF40 series;  
 EFL1F metallic series, EFL15 metallic series, EFL20 metallic series,  
 EFL30 metallic series;  
 EFTA1 series, EFTA2 series, EFTA3 series;  
 EFT1F food series, EFT15 food series, EFT20 food series, EFT30 food series;  
 EFF2 hygienic series, EFF4 hygienic series, EFF8 hygienic series,  
 EFF15 hygienic series

## Marking:

-  II 2G c T5
-  II 2D c T100°C
-  II 2 G Ex h IIB T4...T3 Gb